

T-Handle Gripper®

T-Handle Aluminum Gripper® Plug Features:


- Ideal for long term applications
- 6" - 12" plugs are sized for concrete, clay, and SDR 26 and 35 pipe
- 15" and 18" plugs are sized for concrete and clay pipe sizes only
- Available with or without bypass
- Can be used for sewer air pressure tests

Equipped with:

- Heavy duty aluminum body and zinc plated steel T-handle
- Chemical resistant neoprene o-ring



Line Acceptance Test

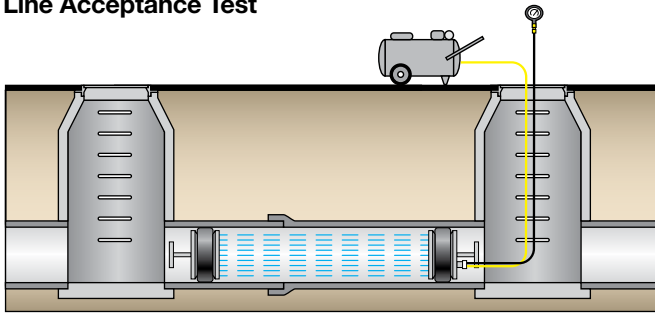

T-Handle Gripper with Bypass

Part Number	Nominal Size	Usage Range	Maximum Back Pressure	Length	Product Weight	Bypass Diameter (NPT)
272949	6" (150 mm)	5.7"-6.3" (144-160 mm)	17 psi (1,2 bar)	40 ft. (12 M)	9.7" (247 mm)	6.5 lbs (3 kg)
272957	8" (200 mm)	7.7"-8.3" (196-211 mm)	17 psi (1,2 bar)	40 ft. (12 M)	9.7" (247 mm)	9.5 lbs (4.3 kg)
272965	10" (250 mm)	9.8"-10.3" (248-262 mm)	17 psi (1,2 bar)	40 ft. (12 M)	9.7" (247 mm)	12.5 lbs (5.7 kg)
272973	12" (300 mm)	11.7"-12.3" (297-312 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	9.7" (247 mm)	16 lbs (7.3 kg)
272981	15" (380 mm)	14.8"-15.3" (377-388 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	9.7" (247 mm)	24 lbs (10.7 kg)
272998	18" (460 mm)	17.7"-18.3" (450-465 mm)	8.7 psi (0,61 bar)	20 ft. (6.1 M)	9.7" (247 mm)	31 lbs (14 kg)

T-Handle Gripper

Part Number	Nominal Size	Usage Range	Maximum Back Pressure	Length	Product Weight
272892	6" (150 mm)	5.7"-6.3" (144-160 mm)	17 psi (1,2 bar)	40 ft. (12 M)	9.7" (247 mm)
272906	8" (200 mm)	7.7"-8.3" (196-211 mm)	17 psi (1,2 bar)	40 ft. (12 M)	9.7" (247 mm)
272914	10" (250 mm)	9.8"-10.3" (248-262 mm)	17 psi (1,2 bar)	40 ft. (12 M)	9.7" (247 mm)
272922	12" (300 mm)	11.7"-12.3" (297-312 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	9.7" (247 mm)
272930	15" (380 mm)	14.8"-15.3" (377-388 mm)	13 psi (0,9 bar)	30 ft. (9.1 M)	9.7" (247 mm)
272888	18" (460 mm)	17.7"-18.3" (450-465 mm)	8.7 psi (0,61 bar)	20 ft. (6.1 M)	9.7" (247 mm)

Always block plugs when conducting air tests.